



Front View



Features

- Front access dual USB ports
- 2 x middle fans + 1 x rear blower fan for superior cooling
- Includes riser card mounting bracket
- 3 x full height or 7 x low profile expansion slots
- Short-depth design for space critical application

Rear View




Specifications


Dimensions (W x D x H)	mm : 427 x 431.8 x 88	
	inches : 16.8 x 17 x 3.5	
Industry Standard	EIA-RS310D	
Material	Heavy-duty cold-rolled steel	
Color	Black	
Cooling	2 x 80x25mm fans	
Power Supply	1U 400W FLEX single PSU	
Expansion Slots	Options	3 full height via riser card
		7 low profile
Front Panel	System power on/off, System reset and 2 x USB 3.0 ports	
LED Indicators	Power status, LAN activity and Drive activity	
System Board	Up to 12"(W) x 9.6"(D) ATX compliant MB	

Drive Bays	External	5.25"	1
		3.5"	1
	Internal	3.5"	3
	Peripheral Drive	Slim DVD-ROM	1
Storage Temperature	0°C(32°F) ~ 50°C(122°F)		
Humidity	5%~95% non-condensing		
Gross Weight	(w/ PSU; w/o Rail)	kgs : 12.7	
		lbs : 28	
Packaging Dimensions	(W x D x H)	mm : 588 x 598 x 257	
		inches : 23.1 x 23.5 x 10.1	
Cubic Feet	2.8		
Container Load Quantity	20'	335	
	40'	690	
	40' H	775	
Mounting	Options	20" slide rail	
		26" slide rail	

Top View

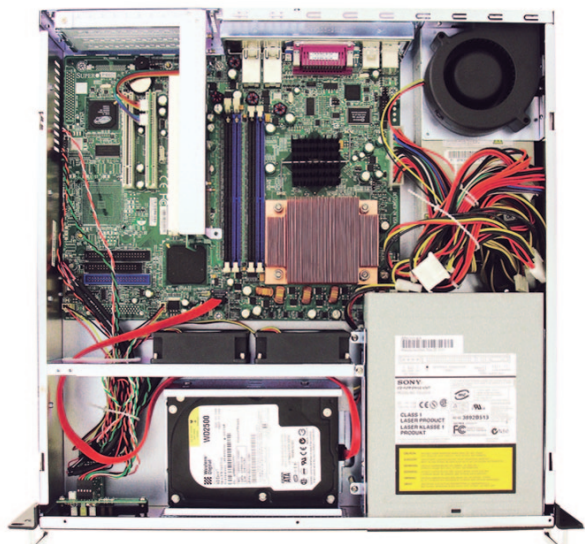

(Power supply is optional. Motherboard is not included.)

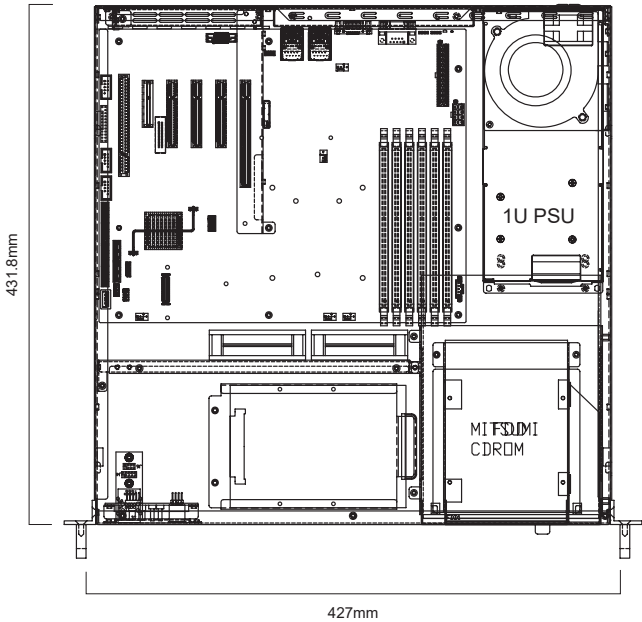

Ordering Information

SKU Number	Description
XE1-2A000-01	2U with 2x 8025 fan, 3 full height slot PCI rear panel, w/o power supply, w/o rail, black
XE1-2A000-05	2U with 2x 8025 fan, 7 low profile slot with 300W single power supply
XE1-2A000-06	2U with 2x 8025 fan, 7 low profile slot low profile rear panel, with 500W (P1H-5500V) PSU bracket, w/o rail, black
XE1-2A000-09	2U with 2x 8025 fan, 3 full height slot PCI rear panel, with 400W FLEX single PSU, w/o rail, w/o blower fan, black
XE1-2A000-10	2U with 2x 8025 fan, 7 low profile slot low profile rear panel, with 400W FLEX single PSU, w/o rail, w/o blower fan, black

RMC-2A