
RSC-4ETS Rackmount Storage Chassis



Features


- Tool-less design supports quick installation and easy maintenance:
  - Tool-less 3.5” & 2.5” drive trays
  - Tool-less top covers
  - Tool-less backplane
  - Tool-less slide rails
- 12Gb/s SAS3 / 24Gb/s SAS4 expander chip
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5” drive tray comes with 4 screw holes to adapt to 2.5” drive
- 2.5” SATA or NVMe hot swap as OS/Cache/Tiering storage
- Comes with a redundant PSU 80+ Platinum
- Two front access USB3.2 Gen1 x1 ports

Front View

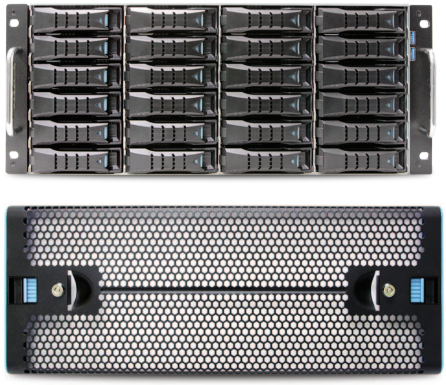

Optional item - Front door

Rear View

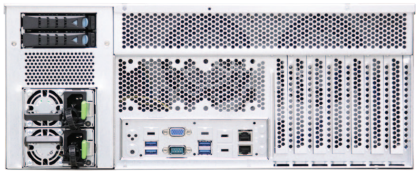


Specifications

Dimensions (W x D x H)	mm : 435 x 560 x 177		
	inches : 17 x 22 x 7		
Industry Standard	EIA-RS310D		
Material	Heavy-duty preplated SGCC cold-rolled steel		
Color	Front Panel : Black		
Cooling	3 x 120x25mm PWM hot swap fans		
Power Supply	800W 1+1 redundant PSU 80+ Platinum		
Expansion Slots	7		
Front Panel	System power on/off, System reset and 2 x USB3.2 Gen1 x1 ports		
LED Indicators	Power, LAN, Drive and Alert		
System Board	12”(W) x 9.6”(D) ATX		
Drive Bays	External	3.5” hot swap	24
		2.5” hot swap	Options: • 2/8 x 2.5” hot swap • 2 x 2.5” internal
	Internal	2.5”	

Backplane	• SKUA: 1 x 24-port SAS3 expander backplane • SKUB: 1 x 24-port SAS4 expander backplane	
Storage Temperature	0ºC(32ºF) ~ 50ºC(122ºF)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	kgs : 28.4
		lbs : 62.6
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 310
		inches : 25.4 x 32.9 x 12.2
Cubic Feet	6.56	
Container Load Quantity	20’	145
	40’	298
	40’ H	358
Mounting	Standard	28” tool-less slide rail

Top View



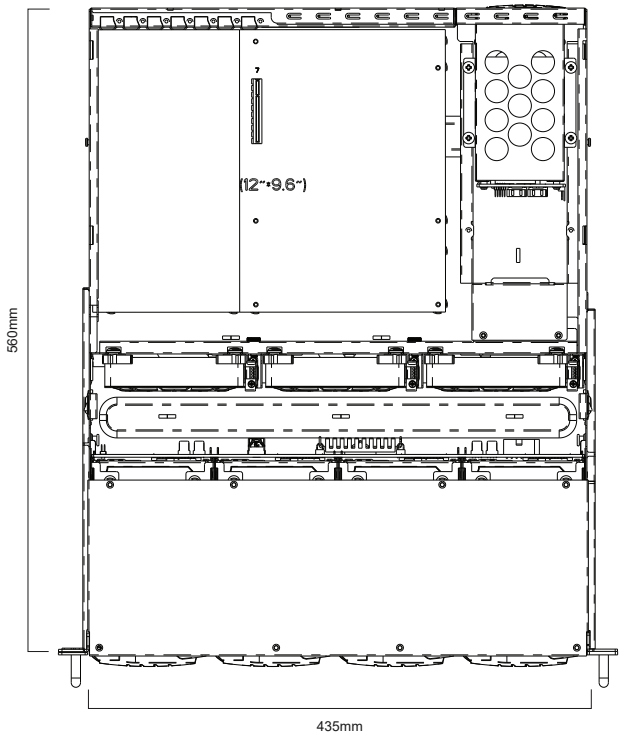

(Power supply is optional. Motherboard is not included.)

Ordering Information

SKU Number	Description
XE1-4ETS0-01	4U 24x 3.5” hot-swap bays, tool-less 3.5” and 2.5” HDD tray, 800W Platinum CRPS redundant power supply, 2x 2.5” hot-swap OS, slide rail, 4U24 SAS 12G passive backplane support 4x NVMe (for PCIe Gen3 device only / option customized cable)
XE1-4ETS0-02	4U 24x 3.5” hot-swap bays, tool-less 3.5” and 2.5” HDD tray, 800W Platinum CRPS redundant power supply, 2x 2.5” hot-swap OS, slide rail, 4U24 SAS 12G expander controller on backplane (3X series)
XE1-4ETS0-06	4U 24x 3.5” hot-swap bays, tool-less 3.5” and 2.5” HDD tray, 800W Platinum CRPS redundant power supply, 2x 2.5” hot-swap OS, slide rail, 4U24 SAS 12G expander controller on backplane (35X series)
XE1-4ETS0-09	4U 24x 3.5” hot-swap bays, tool-less 3.5” and 2.5” HDD tray, 800W CRPS Titanium redundant power supply, 2x 2.5” hot-swap OS, slide rail, 4U24 SAS 12G expander controller on backplane (35X series)

Remark: All specifications and photos are subject to change without notice. © 2025 AIC Inc. All rights reserved.