


## XJ3000-4603M



### Features :


- Easy maintenance and management
- High performance and scalability
- External port self-configuration to host or expansion
- Zoning support
- Adjustable Thermal Profile
- Easy deployment

#### • FRONT VIEW •

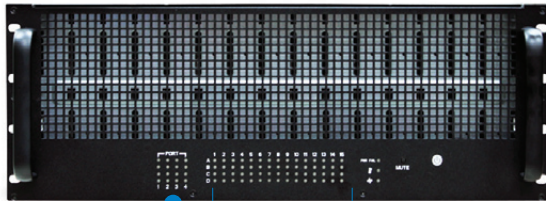

External ports LED      Hard drive LEDs

#### • REAR VIEW •

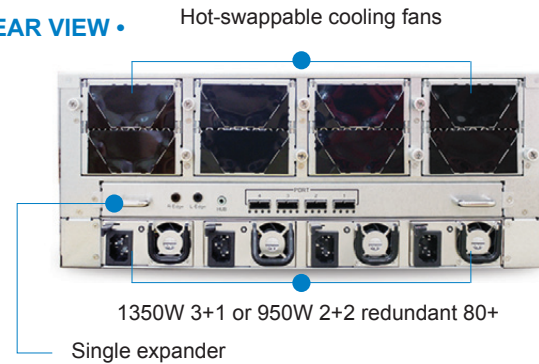

### SPECIFICATIONS

General	Number of Expander	Single
	Expander Chip	LSISAS 2x28 + 2 x LSISAS2x36
	Host/Expansion Interface	4 x Mini SAS (SFF-8088)
Drives Supported	Drive Interface	3.0/6.0 Gb SATA/SAS
	Form Factor	3.5", 1" height
Administration / Management	Admin/Firmware Upgrade	In-band & Serial port Interface
	LED Indicators, Audible Alarm	Yes
Hot-swap and Redundancy	Disk Drive	Hot-swap 60-bay
	Cooling	4 x 8038 hot-swap fans
	Power Supply	1350W 3+1 or 950W 2+2 redundant 80+

Electrical and Environmental	Universal A/C Input	100~240V AC full range
	Operating Environment	Temperature 0°C to 35°C Relative humidity 20% to 80%
	Non-operating Environment	Temperature -20°C to 60°C Relative humidity 10% to 90%
Physical Specification	Dimensions (W x D x H) (with chassis ears)	mm : 482.6 x 836 x 175 inches : 19 x 33 x 7
	Gross Weight (w/ PSU and Rail)	37 kgs / 82 lbs
	Packaging Dimension (W x D x H)	mm : 605 x 1080 x 404 Inches : 23.8 x 42.5 x 16
	Mounting Option	26" tool-less rail